


Dimensions of Hook Bolts, Right Angle Bend

ASME B 18.31.5-2011

PIN Fields		D Diameter and UNC Thread	L Inside Length			C Inside Width			T Thread Length	
			Basic	Max.	Min.	Basic	Max.	Min.	Max.	Min.
3, D	5, LCT									
06	060	3/8-16	6.000	6.125	5.875	1.000	1.125	0.875	1.625	1.375
06	080	3/8-16	8.000	8.125	7.875	1.000	1.125	0.875	1.625	1.375
06	100	3/8-16	10.000	10.125	9.875	1.000	1.125	0.875	1.625	1.375
06	120	3/8-16	12.000	12.125	11.875	1.000	1.125	0.875	1.625	1.375
06	140	3/8-16	14.000	14.125	13.875	1.000	1.125	0.875	1.625	1.375
06	160	3/8-16	16.000	16.125	15.875	1.000	1.125	0.875	1.625	1.375
08	060	1/2-13	6.000	6.125	5.875	1.000	1.125	0.875	2.125	1.875
08	080	1/2-13	8.000	8.125	7.875	1.000	1.125	0.875	2.125	1.875
08	100	1/2-13	10.000	10.125	9.875	1.000	1.125	0.875	2.125	1.875
08	120	1/2-13	12.000	12.125	11.875	1.000	1.125	0.875	2.125	1.875
08	140	1/2-13	14.000	14.125	13.875	1.000	1.125	0.875	2.125	1.875
08	160	1/2-13	16.000	16.125	15.875	1.000	1.125	0.875	2.125	1.875
08	180	1/2-13	18.000	18.125	17.875	1.000	1.125	0.875	2.125	1.875
10	060	5/8-11	6.000	6.125	5.875	2.000	2.125	1.875	4.188	3.812
10	080	5/8-11	8.000	8.125	7.875	2.000	2.125	1.875	4.188	3.812
10	100	5/8-11	10.000	10.125	9.875	2.000	2.125	1.875	4.188	3.812
10	120	5/8-11	12.000	12.125	11.875	2.000	2.125	1.875	4.188	3.812

NOTE: ALL DIMENSIONS ARE IN INCHES

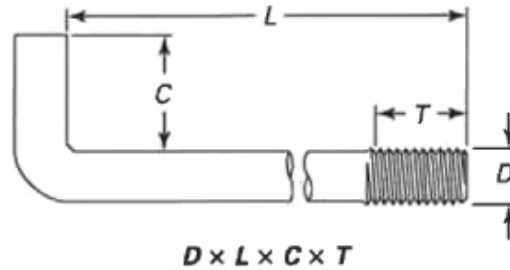

www.hasmnorthamerica.com
 sales@hasmnorthamerica.com
 +1 416 549-4926

Dimensions of Hook Bolts, Right Angle Bend

ASME B 18.31.5-2011

PIN Fields		D Diameter and UNC Thread	L Inside Length			C Inside Width			T Thread Length	
			Basic	Max.	Min.	Basic	Max.	Min.	Max.	Min.
3, D	5, LCT									
10	140	5/8-11	14.000	14.125	13.875	2.000	2.125	1.875	4.188	3.812
10	160	5/8-11	16.000	16.125	15.875	2.000	2.125	1.875	4.188	3.812
10	180	5/8-11	18.000	18.125	17.875	2.000	2.125	1.875	4.188	3.812
12	080	3/4-10	8.000	8.188	7.812	3.000	3.188	2.812	4.250	3.750
12	100	3/4-10	10.000	10.188	9.812	3.000	3.188	2.812	4.250	3.750
12	120	3/4-10	12.000	12.188	11.812	3.000	3.188	2.812	4.250	3.750
12	140	3/4-10	14.000	14.188	13.812	3.000	3.188	2.812	4.250	3.750
12	160	3/4-10	16.000	16.188	15.812	3.000	3.188	2.812	4.250	3.750
12	180	3/4-10	18.000	18.188	17.812	3.000	3.188	2.812	4.250	3.750
12	240	3/4-10	24.000	24.250	23.750	3.000	3.188	2.812	4.250	3.750
16	100	1-8	10.000	10.188	9.812	3.500	3.688	3.312	6.250	5.750
16	120	1-8	12.000	12.188	11.812	3.500	3.688	3.312	6.250	5.750
16	140	1-8	14.000	14.188	13.812	3.500	3.688	3.312	6.250	5.750
16	160	1-8	16.000	16.188	15.812	3.500	3.688	3.312	6.250	5.750
16	180	1-8	18.000	18.188	17.812	3.500	3.688	3.312	6.250	5.750
16	240	1-8	24.000	24.250	23.750	3.500	3.688	3.312	6.250	5.750

NOTE: ALL DIMENSIONS ARE IN INCHES